


Technical Sheet -

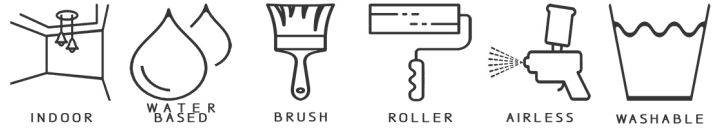

Highly washable with superb abrasion resistance. High adhesion, coverage, filling, and colour stability to light. For indoor use.

DESCRIPTION

Highly washable with superb abrasion resistance. High adhesion, coverage, filling, and colour stability to light. For professional use.

PROPERTIES

- Abrasion resistant
- Good coverage

TECHNICAL DATA

Classification UNI 8681	One-pack, physical drying matt acrylic topcoat paint dispersed in water (B4.C.O.A.2.FA)
Film appearance UNI 13300	Matt (≤ 10 gloss 85°)
Thickness UNI 13300	Class A, fine ($< 100 \mu\text{m}$)
Hiding power EN13300	Class 3
Wet abrasion resistance EN 13300	Class 3
Specific weight	1440 ± 50 g/l
pH	7-8
Type of binder	Acrylic
Solid content	$56 \pm 2\%$
Vapour permeability EN 1062	Class V1 High
Drying time	Can be overpainted after 6 hrs, completely dry after 12 hrs
VOC	Cat A/a: limit 30 g/l (2010) This product contains a maximum of 30 g/l of VOCs

CHARACTERISTICS

Colour range	White and Colours can be produced with the You Color tinting system
Coverage	With the application of 2 coats: 7-8 mq/l (75-86 sq ft/l)
Coverage per pack	(12 l): 96 mq, approx. Coverage varies according to substrate absorption.
Dilution	20-30%=200-300 ml per litre of product
Diluted with	Water
Overpaintable	Compatibility with other products: compatible with all water-based products

APPLICATION

Suitable Substrates:

Cement-based plasters, skimmed walls and gypsum features, exposed reinforced concrete, precast concrete features, fibre cement, previously treated iron

Preparation of the Substrate:

All substrates must be free of release agents and must be dry, clean and coherent. Plasters must be sufficiently cured according to the type of material and manufacturer's instructions. On surfaces with mould or algae, first apply a coat of Sana Solux and wait at least 24 hours before proceeding as indicated in the technical data sheet. In the case of old paint or dusty substrates, we recommend applying a coat of METROFIX consolidating primer or removing them if this is not sufficient.

Application Procedure:

Mix ACQUA DOLCE using a low speed mixer. Apply one coat and wait at least 6 hours. For brush or roller painting, to achieve a uniform appearance, cross the direction of strokes

Type of Equipment:

brush, short-haired wool roller, airless spraying equipment

Ambient Conditions:

min +5°C max +40°C max RH 80%

STORAGE

Packaging:

12 l – 5l – 0.75 l

Duration and Preservation:

2 years when stored in undamaged packages at between 5 and 30°C; cannot endure frost and direct sunlight

Dispose of in accordance with local regulations.

For information on possible hazards, refer to the safety data sheet.

CERTIFICATION\CLASSIFICATION

