


OLD TIME FINISH

Technical Sheet - Ed. 02/2023

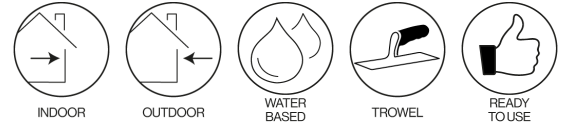

Lime putty-based marble stucco

DESCRIPTION

Very fine-grained eco-friendly stucco for interior decorations to obtain encaustic-type glossy marbled finishes. Workable alone or in combination with OLD TIME MAX. For indoors and outdoors. For professional use.

MAIN PROPERTIES

- Eco-friendly
- Mineral
- Glossy marble effect
- Outstanding workability



TECHNICAL DATA

Film aspect EN 13300	Matt (≤ 10 gloss 85°)
Granulometry (EN 13300 / EN 1062)	200 μ max
Classification (UNI 8681 / UNI 8682)	Thick-coat paint for the topcoat in a one-pack, chemical-physical drying, matt finish, dispersed in water (C.4.C.O.D.2.C.SA) > 12 \pm 0.2
Specific weight	1560 \pm 50 g/l
Type of binder	Lime
Solid content	60 \pm 2%
Drying time	48 hrs to 20°C
Vapour permeability (class V) (EN 1062)	Sd 0.06 \pm 0.02 m; Class V1 High
Water absorption (class W) (EN 1062)	Class W1, High
VOC	Cat A/I: limit 200 g/l (2010); this product contains a maximum of 1 g/l of VOCs

CHARACTERISTICS

Coverage	0.8 - 1 m ² /kg with 2 coats application
Overpaintable	Compatibility with other products: water-based products
Coverage per pack	(20 kg): 20 mq, approx. (2 coats) Coverage varies according to the roughness of the substrate.
Colour range	Materia Naturale colour chart. Use of special colours that require organic pigments to achieve the tone are not recommended
Diluted with	Water
Dilution	Ready to use, any presence of water on the surface is to be considered normal and must be removed before use. consistency

APPLICATION

Notes:

For each specific area, we recommend using product from the same batch, otherwise there may be slight differences in shade.

Suitable Substrates:

Concrete, civil plasters, painted civil plasters, plaster skim coats and plasterboards, surfaces already prepared and treated with Old Times Max, mineral substrates

Ambient Conditions:

Min +5°C max +40°C max RH 80%

OLD TIME FINISH

Technical Sheet - Ed. 02/2023

Preparation of the Substrate:

All substrates must be sufficiently seasoned, carefully prepared by manual brushing and/or washing with a pressure washer depending on the nature of the dirt deposited on the surfaces to be treated. Old loose or flaking paint must be removed. On surfaces with the presence of algae or mold, treat with the SANASOLUX sanitizing cycle. In the presence of grouted or dusty parts, apply a coat of Metro Fix or for mineral substrates, IVASIL PRIMER or SILOFIX inorganic fixative

Plasterboard, plaster smoothing,

Application of a coat of Metro fix acrylic fixative, wait for drying and complete with the application of a coat of METROCOAT (METROPOLIS) opaque primer.

CLS and new civil plasters

Application of a coat of matt base coat METROCOAT (METROPOLIS).

Already painted plaster

Depending on the type of plaster, carry out any restorations or smoothings with UNIFORM BIANCO/GRIGIO, in the case of mineral plasters, use ASFODELO/ARTEMISIA

Application of a coat of Metro fix acrylic fixative or IVASIL PRIMER SILOFIX inorganic fixative for mineral substrates

Application of a coat of matt base coat METROCOAT (METROPOLIS).

Type of Equipment:

steel trowel (Pollock Stainless Steel trowel)

Application Procedure:

With the wall completely dry, after applying the primer or fixative, mix the product until obtaining a homogeneous paste without lumps, apply a first homogeneous coat of OLD TIME FINISH with a stainless steel trowel and wait for it to dry completely. With the first coat completely dry (12 hours), apply the second coat, spreading the product evenly over the entire surface, creating a flat surface without depressions, but not shiny. Once the second coat is completely dry (12 hours), apply the third coat with short spatula strokes with a width of about 1 m² at a time, then smooth with a 45° inclined trowel. The shine is obtained by pressing the steel trowel with the right angle on the surface just applied.

STORAGE

Storage:

2 years when stored in undamaged packages at between 5 and 30°C; cannot endure frost and direct sunlight.

Disposal and safety indications:

Dispose of in accordance with local regulations.

For information on possible hazards, refer to the safety data sheet.

Packaging:

20 Kg - 5 Kg - 1 Kg