


# OLD TIME MAX SP

# METROPOLIS®

MADE IN ITALY

Technical Sheet - Ed. 02/2023

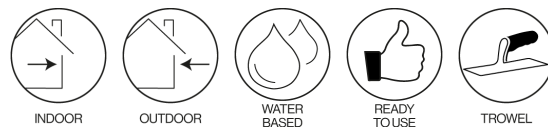


## Paste coating based on lime putty

### DESCRIPTION

Paste coating based on slaked lime, natural pigments, inert fillers, suitable for obtaining historic-artistic finishes. For inside and outside. For professional use.

### MAIN PROPERTIES

- Breathable
- Mainly mineral in nature
- Outstanding workability



### TECHNICAL DATA

Film aspect EN 13300	Matt ( $\leq 10$ gloss $85^\circ$ )
Granulometry (EN 13300 / EN 1062)	1200 $\mu\text{m}$ , S3, Thick ( $< 1500 \mu\text{m}$ )
Classification (UNI 8681 / UNI 8682)	Thick-coat paint for the topcoat in a one-pack, chemical-physical drying, matt finish, dispersed in water (C.4.C.O.D.2.C.SA) > 12
Specific weight	1650 $\pm$ 50 g/l
Type of binder	Lime
Solid content	72 $\pm$ 2%
Drying time	Can be overpainted after 6 hrs, completely dry after 48 hrs to 20°C
Vapour permeability (class V) (EN 1062)	Sd 0.06 $\pm$ 0.02 m; Class V1 High
Water absorption (class W) (EN 1062)	Class W1, High
VOC	Cat A/a: limit 30 g/l (2010); this product contains a maximum of 1 g/l of VOCs

### CHARACTERISTICS

Coverage	With the application of 2 coat: 0.4 mq/Kg (4.3 sq ft/Kg)
Overpaintable	Compatibility with other products: water-based products
Coverage per pack	(25 Kg): 10 mq, approx. Coverage varies according to the roughness of the substrate.
Colour range	Materia Naturale colour chart. Use of special colours that require organic pigments to achieve the tone are not recommended
Diluted with	Water
Dilution	Ready to use, any presence of water on the surface is to be considered normal and must be removed before use.

### APPLICATION

#### Notes:

For each specific area, we recommend using product from the same batch, otherwise there may be slight differences in shade.

#### Suitable Substrates:

Concrete, civil plasters, painted civil plasters, gypsum skim coats and plasterboards

#### Ambient Conditions:

Min +5°C max +40°C max RH 80%

# OLD TIME MAX SP

Technical Sheet - Ed. 02/2023

## Preparation of the Substrate:

All substrates must be sufficiently seasoned, carefully prepared by manual brushing and/or washing with a pressure washer depending on the nature of the dirt deposited on the surfaces to be treated. Old loose or flaking paint must be removed. On surfaces with the presence of algae or mold, treat with the SANASOLUX sanitizing cycle. In the presence of grouted or dusty parts, apply a coat of Metro Fix or for mineral substrates, IVASIL PRIMER or SILOFIX inorganic fixative

Plasterboard, plaster smoothing,

Application of a coat of Metro fix acrylic fixative, wait for drying and complete with the application of a coat of METROCOAT (METROPOLIS) opaque primer.

CLS and new civil plasters

Application of a coat of matt base coat METROCOAT (METROPOLIS).

Already painted plaster

Depending on the type of plaster, carry out any restorations or smoothings with UNIFORM BIANCO/GRIGIO, in the case of mineral plasters, use ASFODELO/ARTEMISIA

Application of a coat of Metro fix acrylic fixative or IVASIL PRIMER SILOFIX inorganic fixative for mineral substrates

Application of a coat of matt base coat METROCOAT (METROPOLIS).

## Type of Equipment:

stainless steel, sponge or plastic trowel (for rustic finishes).

## Application Procedure:

With the wall completely dry, after applying the primer or fixative, mix the product until obtaining a homogeneous paste without lumps, apply a first homogeneous coat of OLD TIME MAX SP with a stainless steel trowel and wait for it to dry completely. Complete with the second coat, spreading the product evenly over the entire surface and before it dries completely, use a sponge trowel to make circular movements on the surface in order to level the marble grains until obtaining a homogeneous appearance. In case of rapid drying, the sponge can be moistened and the work continued until the desired aesthetic effect is achieved. During the drying phase it is possible to polish the surface in order to obtain a satin effect.

## STORAGE

### Storage:

2 years when stored in undamaged packages at between 5 and 30°C; cannot endure frost and direct sunlight.

### Disposal and safety indications:

Dispose of in accordance with local regulations.

For information on possible hazards, refer to the safety data sheet.

### Packaging:

25 Kg