

spalletta isolante per imbotte lai-sys eps

technical sheet - ed. 02/2026




page 1 of 2

Prefinished LAI-SYS EPS reveal for side wall insulation.

DESCRIPTION

LAI-SYS prefabricated jambs are preassembled systems for window reveal insulation, consisting of an insulating element and an integrated connection profile. The insulating element is available in EPS, polyurethane foam (PU), or mineral wool (MW), and comes with a pre-bonded combined bracket, reinforcing mesh, and surface finish ready for plastering. Also available in the 24 mm thick version with "Typ 45" drip-edge profile.

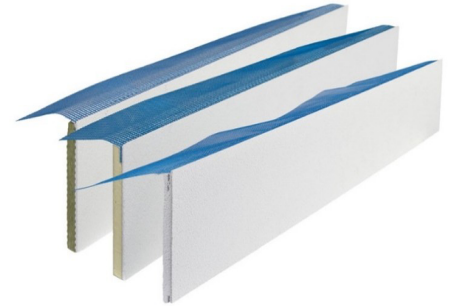

MAIN PROPERTIES

- Simple and quick installation;
- Durable and strong connection on windows and doors;
- Excellent insulating properties;
- Excellent aesthetics;
- Safety;
- Also available in custom sizes.

TECHNICAL DATA

Width	150, 200, 240, 300 e 395 mm
Length bars	1350, 1600, 2000 e 2700 mm
Thermal conductivity	EPS λ 0,035 W/mK PU λ 0,029 W/mK MW λ 0,037 W/mK
Thickness	EPS 14 mm (24 mm on request) PU 24 mm MW 24 mm
Density	EPS 20 kg/m ³

CHARACTERISTICS

APPLICATION

Additional accessories:

See attachment 1

Aluminum connection profile "TYP U" for protecting the LAI-SYS reveal in the presence of sliding shutters, to be fixed with plugs into the window reveal. (14 x 2500 mm; 24 x 2500 mm)

PVC connection profile "U-AL" for protecting the LAI-SYS reveal against the frame or visible shutter guide rail. Self-adhesive and paintable. (14 x 1350 o 1600 o 2000 o 2700 mm; 24 x 1350 o 1600 o 2000 o 2700 mm)

STORAGE

spalletta isolante per imbotte lai-sys eps



page 2 of 2

Storage:

Store in a dry place, away from heat sources.

ATTACHMENTS

Attachment 1: ADDITIONAL ACCESSORIES

