


Aluminium starter profile with drip edge.

DESCRIPTION

Starter profile with drip edge, made of aluminium sheet, alloy EN AW 3103, specifically designed for the initiation and correct installation of external thermal insulation composite systems (ETICS).

The integrated drip edge ensures effective rainwater drainage, helping to protect the lower layers of the system from moisture and deterioration.

The natural aluminium construction provides lightness, good workability, and resistance to corrosion in non-aggressive outdoor environments.

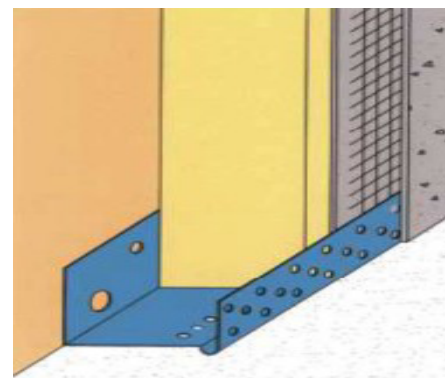

MAIN PROPERTIES

- Dimensional stability;
- Good resistance to atmospheric corrosion;
- Ease of installation;
- Starter and support function for insulation panels.

TECHNICAL DATA

Lenght bars	2,5 m
Material of the profile	Natural aluminium in 3103 alloy
Thickness	Insulation: from 30 to 200 mm Aluminium sheet: from 0,8 to 1,0 mm

CHARACTERISTICS

APPLICATION

Method of application:

Apply exclusively on dry, stable, and clean substrates.

Avoid using abrasive or metallic tools (sandpaper, steel trowels) that may damage the surface coating.

Verify the physical and chemical compatibility with the other materials of the system.

STORAGE

Packaging:

10 pieces (tot 25 m)

Storage:

Store in covered, dry, and well-ventilated environments, away from sources of moisture and corrosive chemical agents.